

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number  
**WO 2004/088602 A1**

(51) International Patent Classification<sup>7</sup>: **G07F 7/10**, 19/00

(21) International Application Number:

PCT/EP2004/002002

(22) International Filing Date: 26 February 2004 (26.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

1023058 31 March 2003 (31.03.2003) NL

1024547 16 October 2003 (16.10.2003) NL

(71) Applicant (for all designated States except US): **KONINKLIJKE KPN N.V.** [NL/NL]; Stationsplein 7, NL-9726 AE Groningen (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MULLER, Frank** [NL/NL]; Hopstraat 59, NL-2611 TB Delft (NL). **RUIJS, Franciscus, Lambertus, Nicolaas** [NL/NL]; Groenstraat 32, NL-5398 Maren Kessel (NL).

(74) Agent: **WUYTS, Koenraad, Maria**; Koninklijke KPN N.V., P.O. Box 95321, NL-2509 CH The Hague (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**


— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

[Continued on next page]

(54) Title: METHOD FOR USING AN ELECTROMAGNETIC SCRATCHCARD TO PROVIDE SERVICES

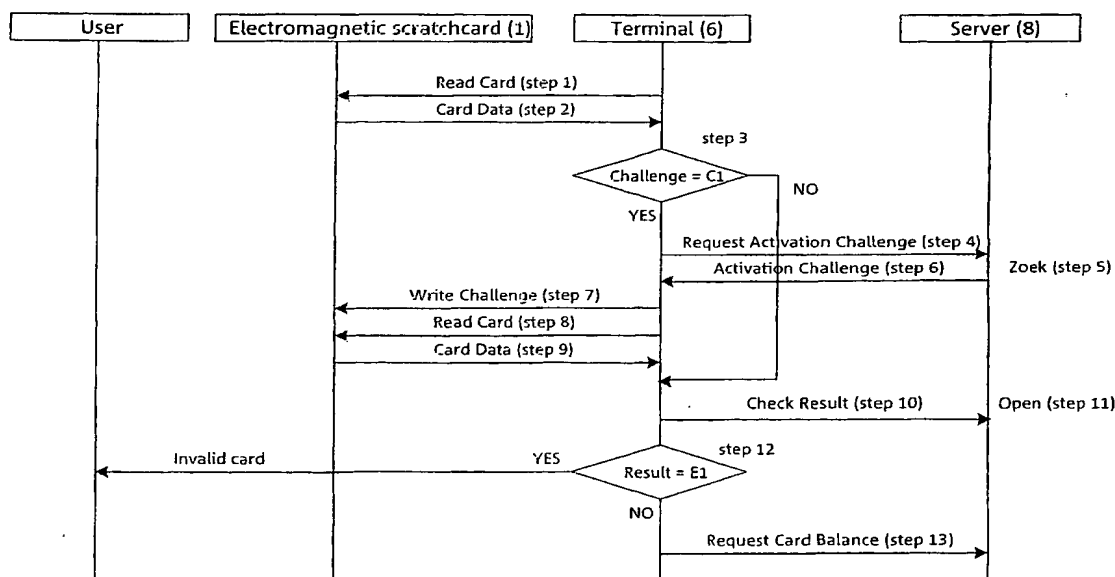

(57) Abstract: The invention pertains to a system and a method for using an electromagnetic scratchcard (1) to provide services between a terminal (6) accessible to a service customer and an infrastructure. The system comprises a network (7) and a server (8) of a service provider, whereby an activation code (3) is present in electronic or magnetic form on the electromagnetic scratchcard (1) and whereby the activation code (3) is used to activate a card balance (13) that is associated with the electromagnetic scratchcard (1) and is stored in the server (8).



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

JC17 Rec'd PCT/PTO 15 JUN 2005

**METHOD FOR USING AN ELECTROMAGNETIC SCRATCHCARD TO PROVIDE SERVICES**

## 5 SCOPE OF THE INVENTION

The invention pertains to a method for using an electromagnetic scratchcard to provide services between a terminal that is accessible to the service customer and a service provider's infrastructure that is connected to the aforementioned terminal  
10 during usage.

## BACKGROUND OF THE INVENTION

A known prepaid phonecard is the so-called scratchcard. By scratching away a  
15 protective layer, the user can make visible a code present on the scratchcard. To use the balance that the scratchcard represents, the user must dial an access number of the service provider and then enter the aforementioned code. Subsequently, the user must dial the required "B" number to set up the telephone connection. The mechanism for reducing the balance on the prepaid scratchcard is  
20 located in the service provider's infrastructure. The method using the scratchcard requires the user to key in a long series of numbers in order to set up the telephone connection, which the user experiences as user-unfriendly.

Another known method is described in patent application PCT/EP01/011310 that  
25 pertains to providing services by means of a prepaid chipcard. According to that method, the identity and validity of the chipcard must be verified from within the service provider's infrastructure before it is possible to use the chipcard. A disadvantage of this known method, however, is that it does not provide a secure procedure for executing verification.

30 An objective of the present invention is to eliminate the aforementioned customer-unfriendliness by placing the code electronically or magnetically on the card. This creates a prepaid electronic or magnetic scratchcard, for example a prepaid chipcard with an electronic scratch code, thus greatly reducing the string of  
35 numbers the user must key in. If the code occurs on a chipcard in electronic form, however, a danger exists that the code will be copied to another chipcard, thus facilitating fraudulent use. A possibility for combating fraud is to use a simple

electronic lock to protect the electronic code against copying attempts. However, a simple electronic lock provides insufficient proper protection. Knowledge of how to unlock an electronic scratchcard's lock means the same unlocking will be usable for all other electronic scratchcards. To improve protection of the electronic code,  
5 relatively expensive logics are required on the electronic scratchcard according to the state of the art.

#### SUMMARY OF THE INVENTION

10 An objective of the present invention is to eliminate the disadvantages of the prior art and to provide a method and a system enabling an electronic or magnetic code on a prepaid card to be used to scratch open the prepaid card securely, without the need for relatively expensive logics to be present on the prepaid card.

15 As the invention applies both to electronic and to magnetic scratchcards, this document refers, where applicable, to an "electromagnetic scratchcard", which refers to electronic or magnetic data storage, or both. Electronic storage can take place in, for example, a semiconductor memory of the chipcard, while magnetic storage can take place in a memory in which information can be copied and read  
20 magnetically.

For this purpose, the invention embodies a method for using an electromagnetic scratchcard to provide services between a terminal accessible to a service user and an infrastructure that comprises a network and a server of a service provider,  
25 whereby an activation code is present in electronic or magnetic form on the electromagnetic scratchcard and whereby the activation code is used to activate a card balance that is associated with the electromagnetic scratchcard and is accessible to the server.

30 The electromagnetic scratchcard thus created can, in one embodiment, be activated as soon as an activation code originating from the electromagnetic scratchcard is offered to a service provider's server via a terminal and a network.

It should be noted that the scratchcard is usable for services from various service  
35 providers.

To read out the activation code from the electromagnetic scratchcard, it is first necessary, in one embodiment, to offer to the electromagnetic scratchcard an activation challenge associated with the electromagnetic scratchcard. To verify whether the offered activation challenge is correct, the activation challenge is compared, by means of simple logics, with an initial challenge present on the electromagnetic scratchcard in electronic or magnetic form. If the activation challenge is correct, the activation code will be released.

According to this invention, the offered activation challenge can, in a further embodiment, be stored on the electromagnetic scratchcard. A result present in electronic or magnetic form on the electromagnetic scratchcard will be assigned the value of the activation code, by means of simple logics on the electromagnetic scratchcard, provided that the offered challenge is correct. If an incorrect activation challenge is offered to the electromagnetic scratchcard, the result will be assigned an error code. In this way, instances of attempted fraud will be recorded on the electromagnetic scratchcard. The result will be sent via the service provider's infrastructure to the server where verification will occur of whether the result has the correct value necessary to activate the electromagnetic scratchcard.

According to this invention, the status of the electromagnetic scratchcard can also be recorded on the electromagnetic scratchcard. In this way, it is possible to record whether the electromagnetic scratchcard is, for example, non-active, activated or empty.

## BRIEF DESCRIPTION OF THE FIGURES

The foregoing and the envisaged advantages of this invention will be further clarified by reading the detailed description given below in conjunction with examination of the accompanying figures, which are intended solely for illustration and not for limitation of the principle of the invention, whereby:

FIG. 1 is a block diagram that shows an electronic scratchcard (1) together with the context in which the electronic scratchcard (1) will be used.

FIG. 2 is a block diagram that shows the structure of the electronic scratchcard (1).

FIG. 3 is a flow diagram that shows the different steps that occur during reading and activation of an electronic scratchcard (1) to be able to use a service offered by a service provider.

5 FIG. 4 is a block diagram that shows the structure of the database (10) in more detail.

#### EXPLANATORY EMBODIMENTS

10 It should be noted that the figure descriptions given below pertain to an electronic scratchcard, i.e. a card in which information is stored electronically. As mentioned earlier, the invention is not confined to this particular embodiment, because information is also storable magnetically. This is the reason why the claims refer to an "electromagnetic scratchcard".

15 FIG. 1 shows an advantageous embodiment of the invention. The shown electronic scratchcard (1) is, for example, a prepaid chipcard. The term scratching as employed here refers to the release of an electronic code present in an electronic circuit (12) on the electronic scratchcard (1) in order to use the electronic  
20 scratchcard (1). A terminal (6) contains the facilities that allow a user to insert the facilities on the electronic scratchcard (1) and to exchange data electronically with the electronic scratchcard. The terminal (6) comprises a processor (18), an electronic storage medium (19) and an input and output device (20). The terminal (6) is connected to an infrastructure (7) of the service provider. This connection  
25 may have been created in any suitable way, for example by such means as all kinds of leased lines (copper-wire, fiber-optic, etc) or by means of a wireless connection. The infrastructure (7) shown in the figure is a fixed or mobile infrastructure that is suitable for providing telephony-related services to users. A server (8) is connected to the infrastructure (7) and can exercise control over the way users are able to use  
30 telephony-related services. The server (8) is a computing unit with a processor (21), a memory (22) and an input and output device (23). A database (10) contains data concerning electronic scratchcards (1).

To be able to use the service, the user must insert an electronic scratchcard (1) in a  
35 terminal (6). Before the user can actually use the electronic scratchcard (1), a secure procedure is run to activate the electronic scratchcard (1). To allow the

procedure to take place securely, the electronic circuit (12) on the electronic scratchcard (1) contains several components that are explained in FIG. 2.

FIG. 2 shows how the electronic circuit (12) of the electronic scratchcard (1) is structured. The electronic circuit (12) contains an electronic storage medium (15), a processor (16) and an input and output device (17). The electronic storage medium (15) on the electronic scratchcard (1) contains a card ID (2). The card ID (2) is, for example, a random value from a very large set. The electronic storage medium (15) further contains an activation code (3). The activation code (3) is the code that, through a secure procedure, must be derived from the electronic scratchcard (1) and then offered, via a network (7), to a server (8) so as subsequently to activate the electronic scratchcard (1). If the electronic scratchcard (1) has been activated, the user will be able to use the service. The activation code (3) is different for each electronic scratchcard (1) and is held in a secure way on the electronic scratchcard (1). After the electronic scratchcard (1) has been issued, the memory location with the activation code (3) can be read only. The activation code (3) is similar to the code that becomes visible on an "ordinary" scratchcard after "scratching" by the user.

To make the activation code (3) secure, the electronic scratchcard additionally contains an initial challenge (4) that, like the activation code (3) itself, is blocked to prevent read-out actions. Moreover, the electronic scratchcard (1) contains a challenge (5) and a result (11). The initial challenge (4) is a code that must be offered, via the network (7), to the electronic scratchcard (1) in order to derive the activation code (3) from the electronic scratchcard (1) and thus activate the electronic scratchcard (1). After the electronic scratchcard (1) has been issued, the memory location containing the initial challenge (4) can be read only.

The challenge (5) is a code that indicates the value that has been offered to the electronic scratchcard (1) for the purpose of activating the card, and by means of which it is further possible to read out the status of the electronic scratchcard (non-active, active, empty), whereby the initial value is C1 (non-active). After the electronic scratchcard (1) has been issued, the memory location with the challenge (5) is capable of being read and written.

In one embodiment, the challenge (5) is placed on the electronic scratchcard (1) by means of a PROM (Programmable Read Only Memory). The bits of the challenge (5)

are writable only from "1" to "0" and not back. The consequence of this is that the maximum number of attempts to "guess" the challenge (5) is limited to the length of the challenge (5) in bits minus one. After a fraudulent person has fruitlessly exhausted the number of attempts, there will be an incorrect challenge (5) on the electronic scratchcard (1), i.e. a challenge (5) that is not equal to the initial challenge (4). An advantage of this invention is that, in this way, it can be seen from the challenge (5) whether an attempt of fraudulent usage has occurred. In another embodiment, the challenge (5) is a large number of, say, 64 bits that is writable without limitation. Because of the large length of the challenge (5), it is virtually impossible to "guess" the correct challenge (5), a circumstance affording protection against fraud.

In one embodiment, a result (11) is present on the electronic scratchcard (1). The result (11) is assigned a value that is determined by whether or not the correct activation challenge (9) is offered to the electronic scratchcard (1).

Using an embodiment of the invention, the activation procedure will be carried out (see FIG. 3). After the user has inserted the electronic scratchcard (1) in the terminal (6), a read-out instruction is sent from the terminal (6) to the electronic scratchcard (1) (step 1). The electronic scratchcard (1) responds by sending the card ID (2) and the challenge (5) to the terminal (step 2). The terminal compares the received challenge (5) with a predetermined unique code C (for example "111...1") (step 3). If the challenge (5) is equal to C1, it means that the electronic scratchcard (1) has not yet been activated and the activation procedure must be continued further.

If the challenge (5) is equal to C1, the terminal (6) will request (step 4) the server (8) to send an activation challenge (9) to the terminal (6). Together with this request, the terminal (6) will send the card ID (2). The activation challenge (9) is a code that, provided it is identical to the initial challenge (4) on the electronic scratchcard (1), enables the activation code (3) to be derived from the electronic scratchcard (1). The activation challenge (9) is recorded centrally in a database (10) of the server (8) and is linked to the card ID (2).

FIG. 4 shows the database (10). The database (10) is a storage medium with electronically stored data that are accessible to the server (8). For each card ID (2), the database (10) contains memory locations within which there is an activation



code check (14), the activation challenge (9) and a card balance (13). The memory location associated with the card ID (2) with the activation code check (14) is used to verify whether the correct activation code (3) originating from the scratchcard (1) is being offered to the database (10). The database (10) memory location  
5 containing the activation challenge (9) associated with an electronic scratchcard (1) is readable for the purpose of offering the activation challenge (9) to the electronic scratchcard (1) in response to a request originating from the terminal (6). In another embodiment, the activation challenge (9) may also originate from a source other than the database (10), for example from the terminal (6). The activation  
10 code check (14) and the activation challenge (9) can be unique, or can be unique in combination with the card ID (2).

The database (10) memory location that contains the card balance (13) associated with a card ID (2) is a value that indicates how long, and additionally or optionally  
15 to what extent, a user may use services by means of the electronic scratchcard (1). In one embodiment, the card balance (13) is a value that is reducible by the server (8). Reduction occurs at such time or for as long as use is made of the service. When reduction has caused the card balance (13) to reach a predefined value (for example, "0"), it will cease to be possible to use the services by means of the  
20 electronic scratchcard (1) in question.

According to this invention, the server (8) finds the activation challenge (9) associated with the received card ID (2) (step 5), and the activation challenge (9) is sent to the terminal (6) (step 6). The terminal (6) sends the activation challenge  
25 (9) to the electronic scratchcard (1), where the challenge (5) is overwritten by the activation challenge (9) (step 7). The terminal (6) then sends to the electronic scratchcard (1) a request to receive a result (11) (step 8). On the electronic scratchcard (1), the challenge (5), which in the meantime contains a value equal to the activation challenge (9) received earlier from the server (8), is compared with  
30 the initial challenge (4). If the challenge (5) is equal to the initial challenge (4), the value of the activation code (3) will be assigned to the result (11). If the challenge (5) is unequal to the initial challenge (4), the result (11) will be given a value of, for example, E1, which represents an error code (for example "00..0"). The result (11) will then be sent to the terminal (6) (step 9).

35

Subsequently, the card ID (2) and result (11) will be sent (step 10) from the terminal (6) to the server (8). The server checks whether the result (11)

corresponds with the value of the activation code (3) in the database (10) that is associated with the card ID (2). If this is the case, the balance associated with the card ID (2) will be activated (step 11). If the result is unequal to the value of the activation code (3) in the database (10), the balance associated with the card ID  
5 (2) will not be activated.

Before the balance associated with the electronic scratchcard (1) is retrieved, the terminal (6) will check whether the result (11) is equal to E1 (step 12). If this is not the case, the terminal (6) can retrieve the activated balance (step 13) and the user  
10 of the electronic scratchcard (1) will be able to use the desired service. If the result (11) is equal to E1, however, the terminal (6) will inform the user that the electronic scratchcard (1) is invalid.

As such time as the electronic scratchcard (1) becomes exhausted, the server (8)  
15 will recognize this circumstance from the value of the card balance (13) (for example, because it has the value "0"), and the server (8) will indicate that the balance associated with the electronic scratchcard (1) has been exhausted. The terminal (6) will then give the challenge (5) a value of C2 (for example, "00... 0"). This value C2 indicates that the card balance (13) associated with the electronic  
20 scratchcard has been exhausted. If the electronic scratchcard (1) is active and not empty, the challenge (5) will have a value that is not equal to C1 or C2, but a value that corresponds with the offered activation challenge (9) (or, in the case of fraudulent use or an error, a different value). An advantage of the invention is that, in this way, it can be seen from the challenge (5) whether the electronic  
25 scratchcard (1) is non-active, active or empty. If the challenge (5) is not equal either to C1 or to C2, it is moreover possible to detect from the result (11) whether there has been an attempt of fraudulent usage. In such a case, the result (11) will be equal to E1, which is caused by a difference between the initial challenge (4) and the challenge (5). This indicates that an attempt has been made to obtain the  
30 activation code (3) from the electronic scratchcard (1) using an incorrect activation challenge (9).

## CLAIMS

1. Method for using an electromagnetic scratchcard (1) to provide services  
5 between a terminal (6) accessible to a service customer and an infrastructure comprising a network (7) and a server (8) of a service provider, whereby an activation code (3) is present in electronic or magnetic form on the electromagnetic scratchcard (1) and the activation code (3) is used to activate a card balance (13) that is associated with the electromagnetic scratchcard (1) and is accessible to the  
10 server (8).
2. Method according to claim 1, whereby a unique card ID (2) in electronic or magnetic form is present on the electromagnetic scratchcard (1).
- 15 3. Method according to claim 1 or 2, whereby the activation code (3) can be read out by offering an activation challenge (9) to the electromagnetic scratchcard (1), whereby the activation challenge (9) must be equal to an initial challenge (4) that is present in electronic or magnetic form on the electromagnetic scratchcard (1).  
20
4. Method according to claim 3, whereby a result (11) present in electronic or magnetic form is used to show whether the activation challenge (9) offered to the electromagnetic scratchcard (1) is equal to the initial challenge (4) present on the electromagnetic scratchcard (1).  
25
5. Method according to claim 4, whereby the card ID (2) and the result (11) are received by the server (8) via the network (7), and the server (8) verifies whether the result (11) corresponds with the activation code (3) associated with the card ID (2) in a database (10), such activation code check (14) being equal to  
30 the activation code (3) on the electromagnetic scratchcard (1).
6. Method according to claim 5, whereby the card ID (2) and the associated activation challenge (9), activation code check (14) and a reducible card balance (13) are located in the database (10) accessible by the server (8).  
35
7. Method according to one of the claims 4 through 6, whereby the result (11) is given the same value as the activation code (3) if the correct activation challenge

(9) has been offered to the electromagnetic scratchcard (1), or otherwise is given an error code E1.

8. Method according to claim 7, whereby the terminal (6) can read out and  
5 verify the result (11), and whereby the terminal (6) gives a report if the result (11) corresponds with the error code E1.

9. Method according to one of the claims 3 through 8, whereby a challenge (5)  
present in electronic or magnetic form on the electromagnetic scratchcard (1)  
10 shows the status of the electromagnetic scratchcard (1) and can be given the value of the activation challenge (9) offered to the electromagnetic scratchcard (1).

10. Method according to claim 9, whereby the terminal (6) reads out the  
challenge (5) in order to determine the status of the electromagnetic scratchcard  
15 (1).

11. Method according to claim 9 or 10, whereby the challenge (5) is set to a  
value C2 if the card balance (13) for the card ID (2) has been used up.

12. Method according to one of the claims 3 through 11, whereby the activation  
20 challenge (9) offered to the electromagnetic scratchcard (1) is stored on the electromagnetic scratchcard (1).

13. Method according to one of the claims 3 through 12, whereby the activation  
25 challenge (9) originates from the server (8).

14. An electromagnetic scratchcard (1) arranged to provide services to a service  
customer by means of a terminal (6) via a service provider's infrastructure  
comprising a network (7) and a server (8), whereby the electromagnetic  
30 scratchcard is provided with a processor (12), a memory (15) connected to the  
processor and an input/output unit (17) connected to the processor and used for  
communication with the terminal, whereby an activation code (3) is stored in the  
memory (15), and the processor (16) is arranged to activate a card balance (13)  
that is associated with the electromagnetic scratchcard (1) and that is accessible to  
35 the server (8), by means of communication with the server and use of the  
activation code (3).

15. An electromagnetic scratchcard (1) according to claim 14, whereby a unique card ID (2) and an initial challenge (4) are also stored in the memory, and the processor is arranged to read out the activation code (3) after receiving an activation challenge (9), whereby the activation challenge (9) must be equal to the  
5 initial challenge (4).

16. An electromagnetic scratchcard (1) according to claim 15, whereby the processor is arranged to store a result (11) in the memory, such result showing whether the activation challenge (9) offered to the electromagnetic scratchcard (1) is equal to the initial challenge (4) present on the electromagnetic scratchcard (1).  
10

17. An electromagnetic scratchcard (1) according to claims 15 and 16, whereby a challenge (5) is also stored in the memory, such challenge showing the status of the electromagnetic scratchcard (1) and being arranged to give the challenge (5) the value of the activation challenge (9) offered to the electromagnetic scratchcard (1).  
15

18. A terminal (6) that is connected to an infrastructure comprising a network (7) and a server (8) of a service provider, whereby the terminal is equipped with a terminal processor (18) and terminal input/output devices (20) to be able to communicate with an electromagnetic scratchcard according to one of the foregoing claims, such terminal processor (18) being arranged to send the electronic data received from the electromagnetic scratchcard (1) over the network (7) to the server (8), and to send the electronic or magnetic data received from the server (8) to the electromagnetic scratchcard (1) and to read out a challenge (5) present on the electromagnetic scratchcard (1) to determine the status of the electromagnetic scratchcard (1).  
20  
25

19. A server (8) that is connected to an infrastructure not directly accessible to a service customer, such infrastructure comprising a network (7) of a service provider, and connected to a database (10), such server (8) being arranged to:  
30 - receive from a terminal (6) electronic or magnetic data via the network (7);  
- compare the electronic or magnetic data received from the terminal (6) with the electronic or magnetic data contained in the database (10);  
35 - retrieve electronic or magnetic data from the database (10) on the basis of electronic or magnetic data received from the terminal (6) and send such data via the network (7) to the terminal (6);

- modify electronic or magnetic data in the database (10) based on electronic or magnetic data received from the terminal (6);
  - retrieve from the database (10) an activation challenge (9) associated with a card ID (2) and send it via the network (7) to the terminal (6), such card ID (2) received
- 5 via the terminal uniquely defining an electromagnetic scratchcard.

20. A server (8) according to claim 19, whereby the server (8) is arranged to reduce de card balance (13) in the database (10) depending upon a service provided to the user of the electromagnetic scratchcard.

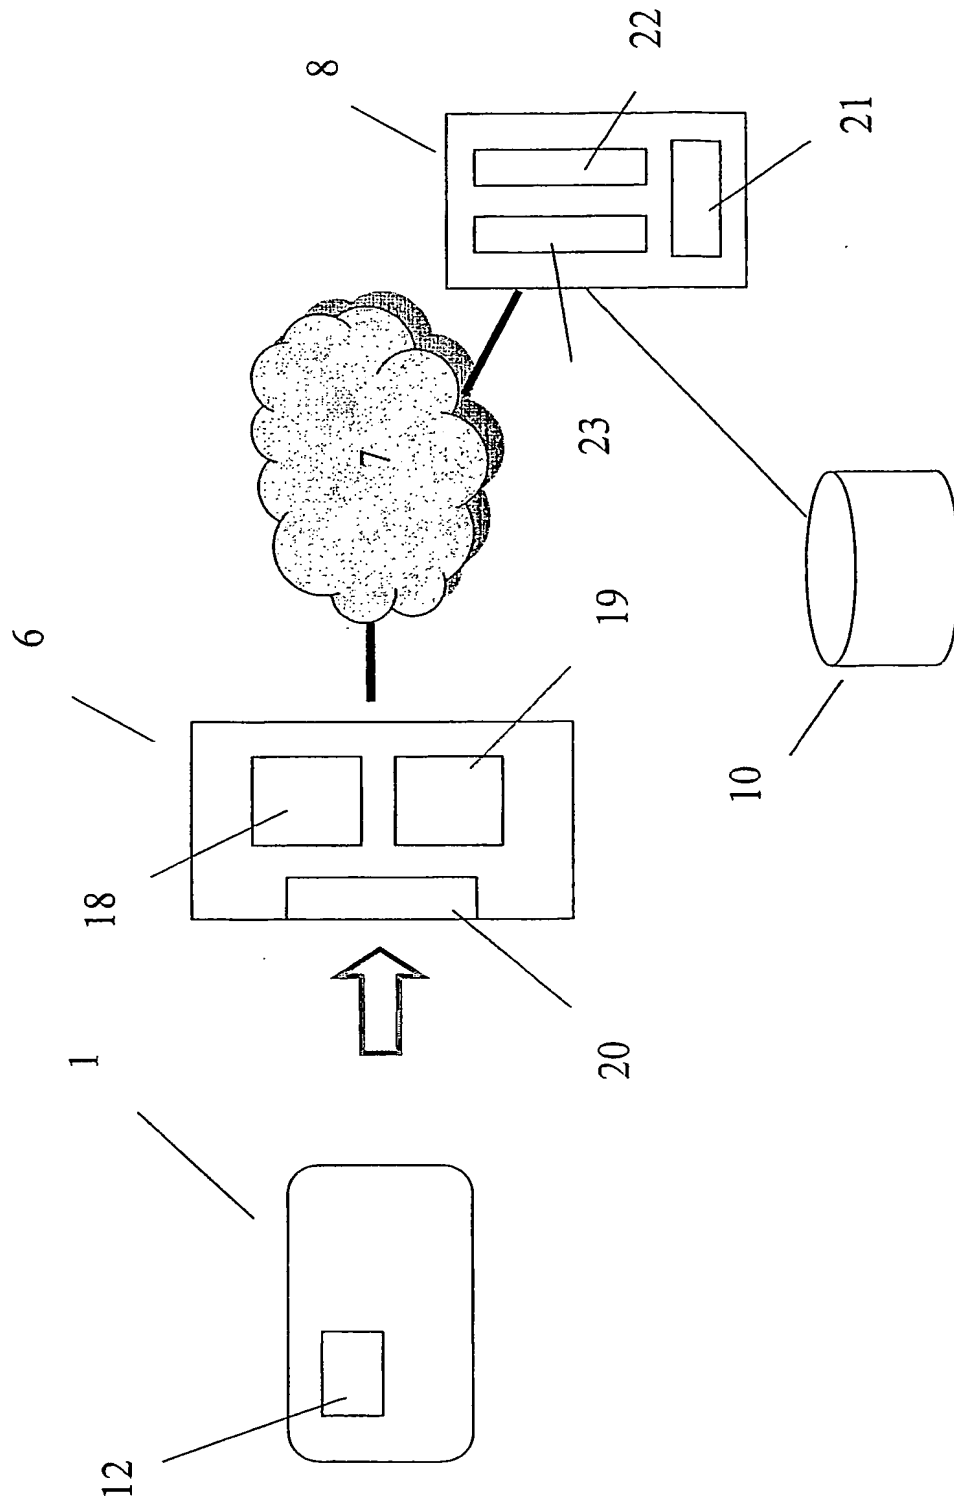


FIG. 1

JC17 Rec'd PCT/PTO 15 JUN 2005

*This Page Blank (uspto)*



10/539084

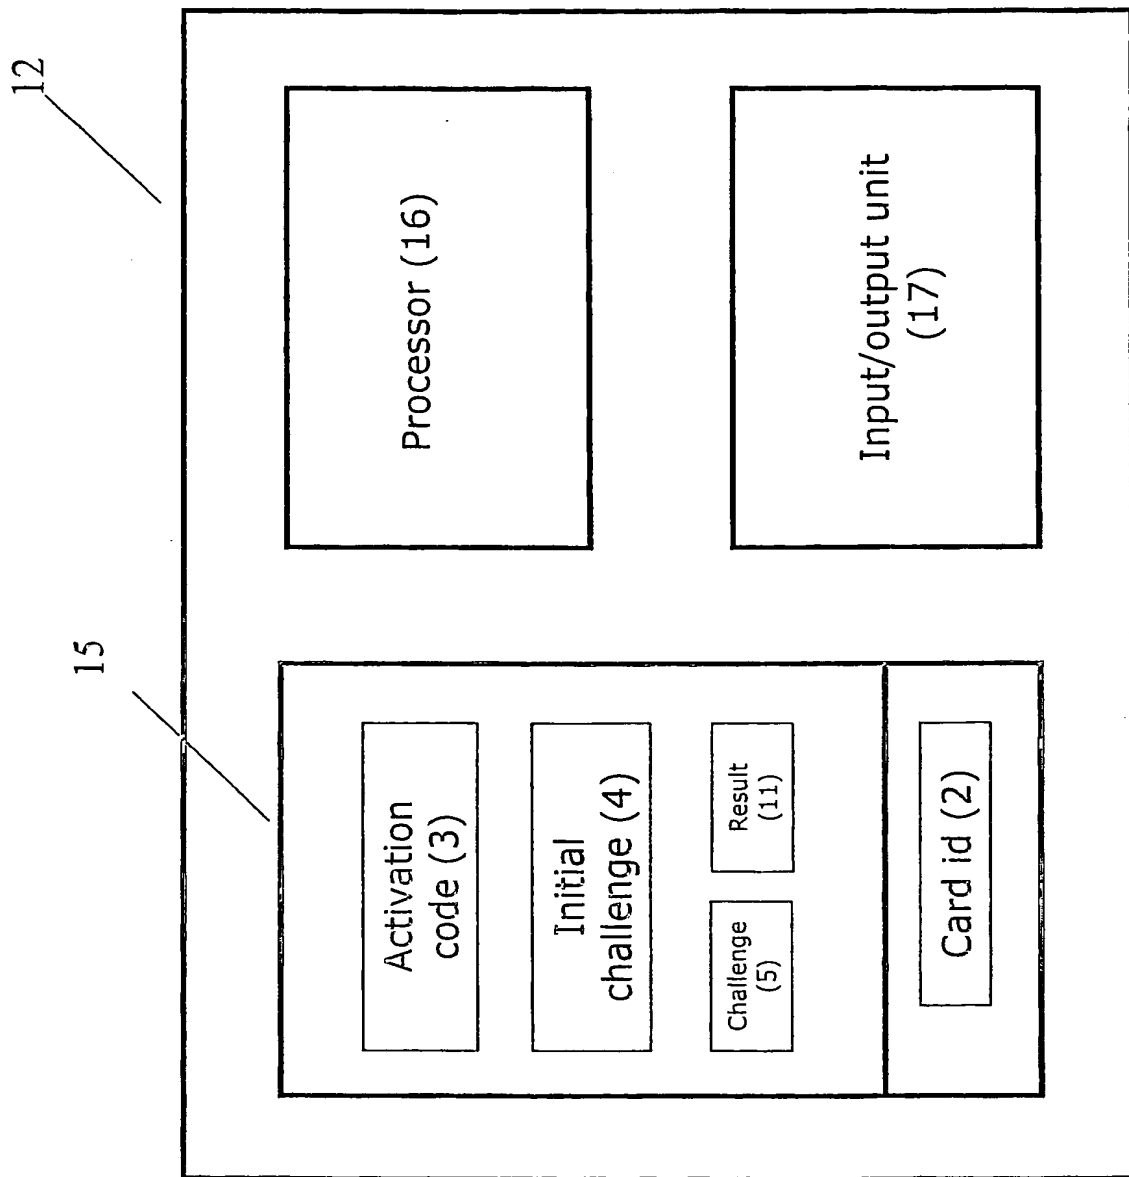


FIG. 2

JC17 Rec'd PCT/PTO 15 JUN 2005

*This Page Blank (uspto)*

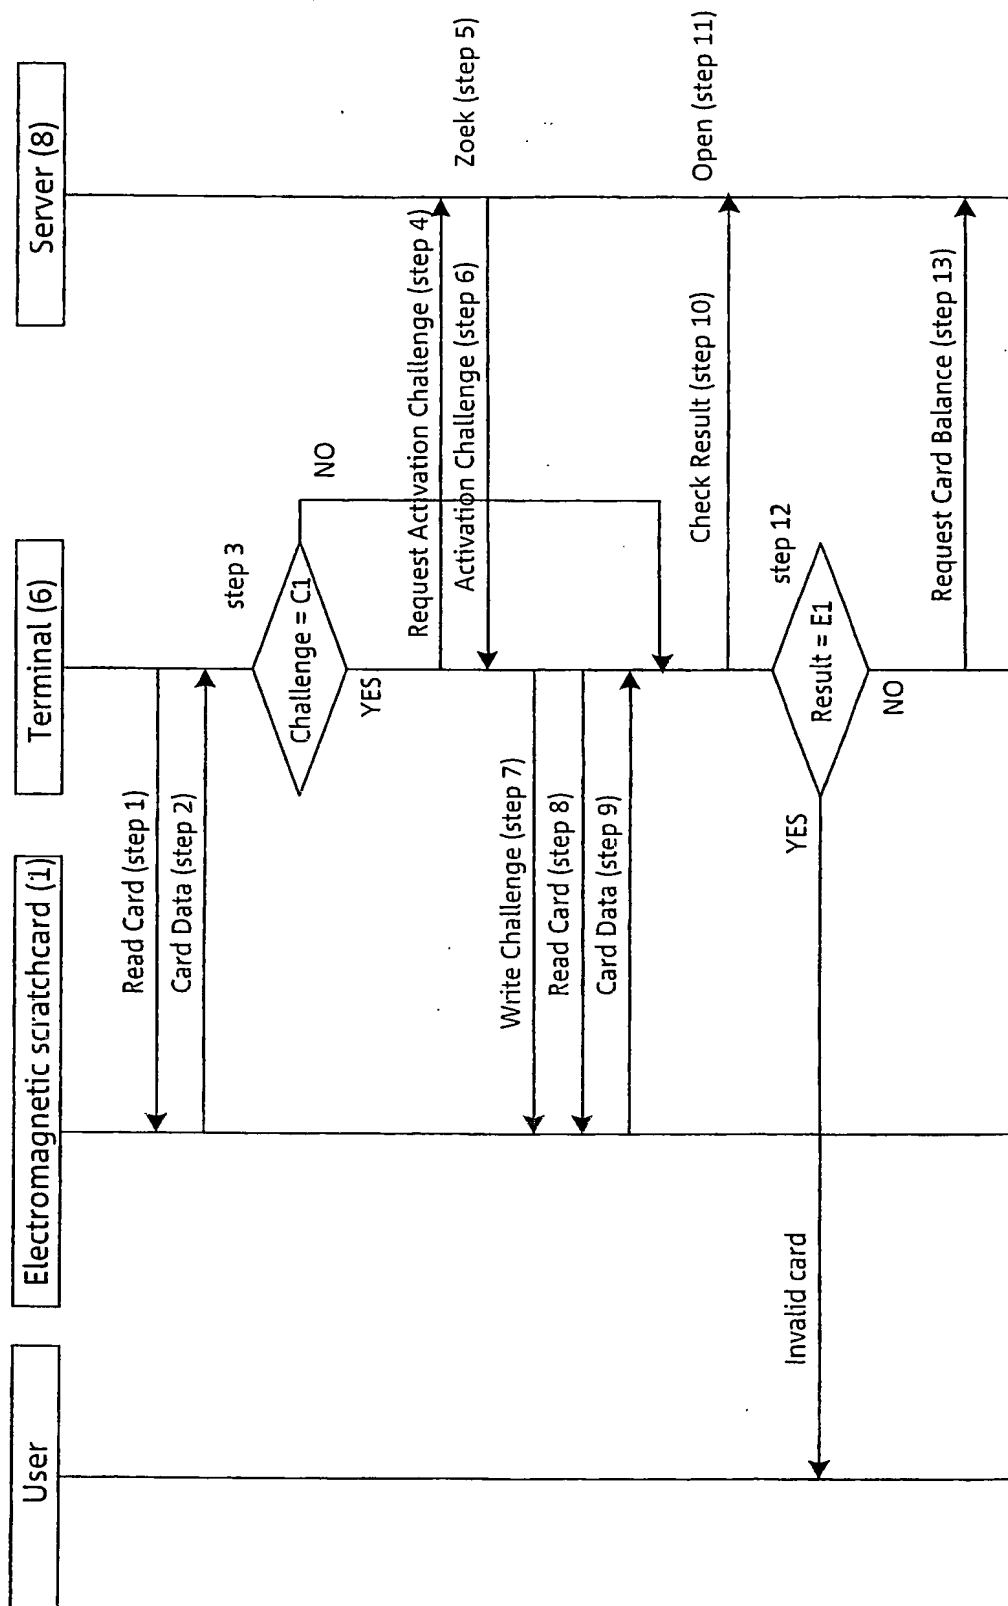


FIG. 3

JC17 Rec'd PCT/PTO 15 JUN 2005

***This Page Blank (uspto)***

10/539084

10

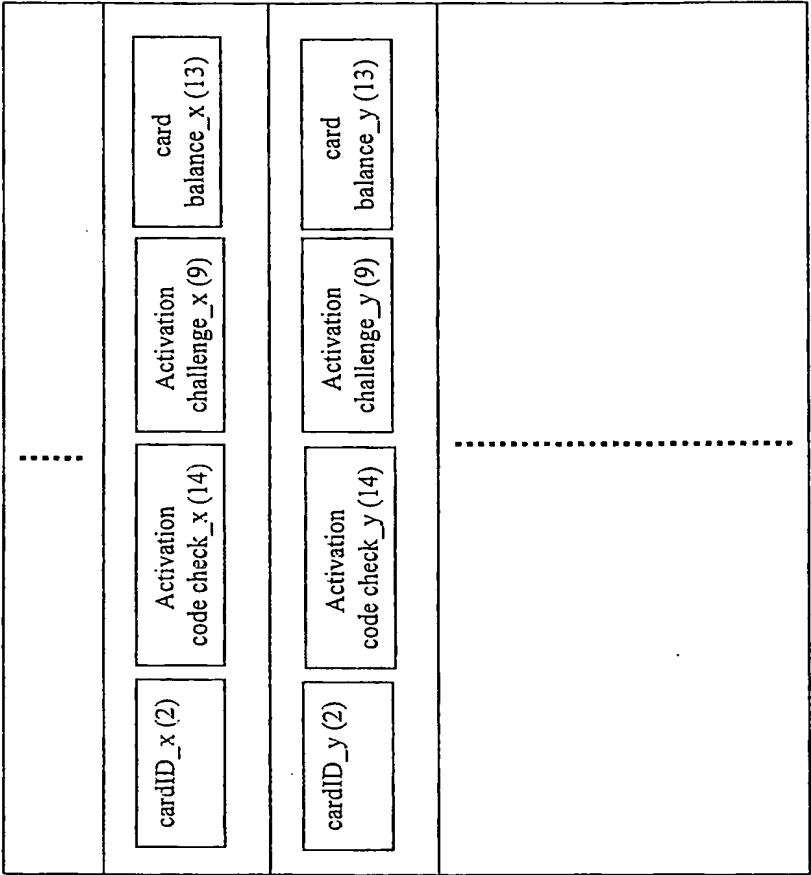


FIG. 4

JC17 Rec'd PCT/PTO 15 JUN 2005

*This Page Blank (uspto)*

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/002002

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G07F7/10 G07F19/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G07F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 0 786 747 A (FRANCE TELECOM) 30 July 1997 (1997-07-30) abstract; claims; figures column 4, line 1 - column 5, line 13 column 3, line 21 - line 40 column 6, line 25 - line 52 -----	1,2,14, 18,19 5,6,20
Y A	DE 197 16 068 A (GIESECKE & DEVRIENT) 22 October 1998 (1998-10-22) abstract; claims; figures 1,4 column 1, line 66 - column 2, line 58 column 5, line 34 - column 6, line 10 column 3, line 35 - line 66 column 5, line 34 - column 8, line 19; figure 6 ----- -/--	1-6, 12-20 7-11

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

27 August 2004

Date of mailing of the international search report

08/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Guivol, 0

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/002002

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 203 543 A (SIEMENS) 3 December 1986 (1986-12-03)	1-6, 12-20
A	the whole document	7-11
A	WO 99/33033 A (VISA INTERNATIONAL SERVICE ASSOCIATION) 1 July 1999 (1999-07-01) page 3, line 1 - line 14 page 7, line 1 - page 10, line 30 page 22, line 18 - page 26, line 14	1-20
A	US 2002/139844 A1 (T. ROCHMANN ET AL.) 3 October 2002 (2002-10-03) abstract; claims; figures	1,2,5,6, 14,18-20
A	WO 01/59724 A (KONINKLIJKE KPN) 16 August 2001 (2001-08-16) cited in the application the whole document	1,2,5, 14,18-20
A	DE 198 60 203 A (DEUTSCHE TELEKOM) 29 June 2000 (2000-06-29) column 3, line 43 - column 5, line 22; claims; figures	1,14
A	EP 1 100 056 A (THREECODEX) 16 May 2001 (2001-05-16) abstract; claims; figures	1
A	EP 0 668 579 A (AT & T) 23 August 1995 (1995-08-23) abstract; claims; figures	1
A	EP 0 971 324 A (EUROPAY) 12 January 2000 (2000-01-12)	



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/002002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0786747	A	30-07-1997	FR 2744268 A1 DE 69709418 D1 DE 69709418 T2 EP 0786747 A1 JP 9312710 A	01-08-1997 07-02-2002 29-08-2002 30-07-1997 02-12-1997
DE 19716068	A	22-10-1998	DE 19716068 A1 AT 213856 T AU 7642198 A DE 59803197 D1 WO 9848388 A2 EP 0976113 A2	22-10-1998 15-03-2002 13-11-1998 04-04-2002 29-10-1998 02-02-2000
EP 0203543	A	03-12-1986	DE 3682435 D1 EP 0203543 A2	19-12-1991 03-12-1986
WO 9933033	A	01-07-1999	AU 758710 B2 AU 1932499 A CA 2315656 A1 EP 1040456 A2 WO 9933033 A2 US 6298336 B1	27-03-2003 12-07-1999 01-07-1999 04-10-2000 01-07-1999 02-10-2001
US 2002139844	A1	03-10-2002	NONE	
WO 0159724	A	16-08-2001	NL 1014371 C2 AU 4237101 A WO 0159724 A1 EP 1257977 A1	15-08-2001 20-08-2001 16-08-2001 20-11-2002
DE 19860203	A	29-06-2000	DE 19860203 A1 WO 0039758 A1 EP 1141904 A1 HU 0104875 A2 US 6745940 B1	29-06-2000 06-07-2000 10-10-2001 28-03-2002 08-06-2004
EP 1100056	A	16-05-2001	IT MI992363 A1 AT 261158 T DE 60008669 D1 DE 60008669 T2 EP 1100056 A2	11-05-2001 15-03-2004 08-04-2004 05-08-2004 16-05-2001
EP 0668579	A	23-08-1995	US 5461217 A BR 9500433 A CA 2138829 A1 CN 1120203 A DE 69531711 D1 DE 69531711 T2 EP 0668579 A2 JP 7319982 A JP 7319983 A US H1794 H	24-10-1995 17-10-1995 09-08-1995 10-04-1996 16-10-2003 01-07-2004 23-08-1995 08-12-1995 08-12-1995 06-04-1999
EP 0971324	A	12-01-2000	EP 0971324 A1 AU 4386099 A WO 0002170 A1	12-01-2000 24-01-2000 13-01-2000

***This Page Blank (uspto)***